


Flowmeters for sprayers

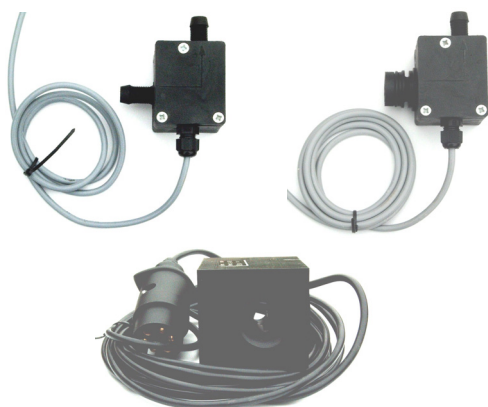

Use

The flowmeter can be used in all assignments where a liquid-flow has to be regulated. The flowmeter can be used with field sprayers. The flowmeter can for instance be inserted in the hose, which leads to the nozzles on the boom section.

For slurry flowmeters please see separate product sheet.

If used with acids like formic acid, please do not hesitate to contact us.

Function

The inserted electronics in the flowmeters, the so-called bus-converter, stabilizes the liquid flow to ensure a precise dosage. The flowmeters constantly gives 50 or 200 pulses pr. litre (dependent on model) throughout the operation areas.

Installation

The flowmeters can be mounted for valves, hose- or high pressure-blocks.

Technical specifications

Voltage:	10 - 28 V DC
Power:	Max. 40 mA
Signal type:	Open collector, 100 Ohm series

Ordering number

Valve mounting for ARAG Series 463:

006-1-0500	2 - 33 l/min, 50P, 1.5 m cable
006-1-2003	0.5 - 8 l/min, 200P, 1.5 m cable

1/2" Hose mounting

006-1-0504	2 - 33 l/min, 50P, 1.5 m cable
006-1-0505	2 - 33 l/min, 50P, 5.0 m cable
006-1-2010	0.5 - 8 l/min, 200P, 7.0 m cable

High-pressure flowmeter

006-1-0511	15-100 l/min, 50P, 1.5 m cable
006-1-0510	15-100 l/min, 50P, 5.0 m cable

Guarantee

1 year guarantee from date of delivery.